



CK 150 B EC (Archived)

Accessories




- Speed controller MS EC
- Pressure regulator CALAIR-PR-230V

TECHNICAL DATA

	7001044 CK 150 B EC
Voltage	230 V
Phase	1 ~
Frequency	50 Hz
Optional frequency	60 Hz
Power	99 W
Current	0.82 A
Speed	3400 r.p.m.
Max. temperature of transported air	60 °C
Max. temperature of transported air when speed controlled	60 °C
Sound pressure level at 3 m	45 dB(A)
Weight	2.8 kg
Enclosure class	44 IP
Insulation class, motor	F
Duct connection	150 mm mm
Max. flow	178 l/s
Max. pressure	636 Pa

SOUND DATA

	Flow (l/s)	L _{WA} tot dB (A)	63Hz	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
4. Surrounding Lw dB(A) 10V	129	53	43	32	45	47	44	46	44	34
4. Outlet Lw dB(A) 10V	129	79	52	65	72	73	72	72	67	57
4. Inlet Lw dB(A) 10V	129	80	55	65	76	75	71	67	64	54
3. Inlet Lw dB(A) 8V	114	73	52	62	68	69	65	62	58	46
2. Inlet Lw dB(A) 6V	81	67	47	59	63	62	58	55	49	35
1. Inlet Lw dB(A) 4V	61	59	41	52	54	54	50	46	36	22

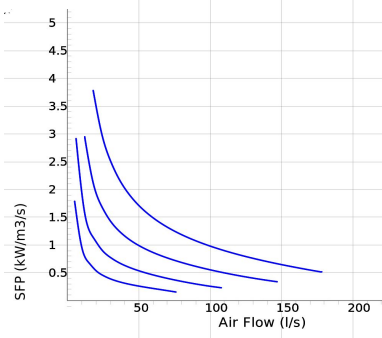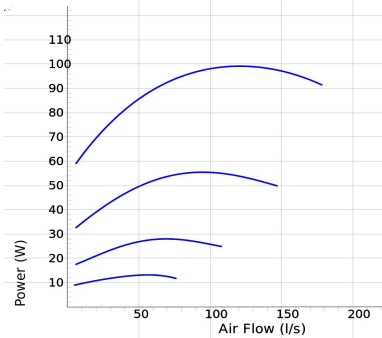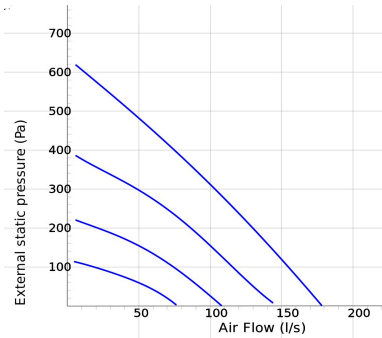

Voltage steps

1	2	3	4
4V	6V	8V	10V

DIMENSIONS

